

# CAMSO WEX 782S

FORMERLY SOLIDEAL BAGGER



WHEEL  
EXCAVATORS



## SOLID PUNCTURE PROOF SOLUTION FOR SEVERE CONDITIONS

Delivers reliable performance and quality for extreme wheel excavator applications. Its enhanced durability and traction make these solid tire the best solution in off-road conditions.

[camsoco](http://camsoco)

## PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



# CAMSO WEX 782S



## SOLID MULTI-STAGE CONSTRUCTION

- Provides flat-free operation and good ride quality

## OPTIMIZED LUG-TO-VOID RATIO

- Enhances chunking resistance and stability


## AGGRESSIVE TREAD DESIGN

- Provides enhanced traction in off-road conditions




TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS			HEEL		LOAD CAPACITY [kg] [lb]						
		O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32 <sup>nd</sup> ]	Normal	Quick	Counterbalanced lift trucks			Other vehicles			Static
							Load wheel		Steering wheel				
		15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph					
9.00-20	6.50-20	974	224	73	■		5940	5400	4500	5400	4905	4500	6795
		38.3	8.8	92.8			13095	11993	9920	11993	10813	9920	14980
9.00-20	7.00-20	974	224	73	■		5940	5400	4500	5400	4905	4500	6795
		38.3	8.8	92.8			13095	11993	9920	11993	10813	9920	14980
9.00-20	7.50-20	974	224	73	■		5940	5400	4500	5400	4905	4500	6795
		38.3	8.8	92.8			13095	11993	9920	11993	10813	9920	14980
10.00-20	7.00-20	1007	248	78	■		6600	6000	5000	6000	5450	5000	7550
		39.6	9.8	99.2			14550	13227	11023	13227	12015	11023	16644
10.00-20	7.50-20	1007	248	78	■	■	6600	6000	5000	6000	5450	5000	7550
		39.6	9.8	99.2			14550	13227	11023	13227	12015	11023	16644
10.00-20	8.00-20	1007	248	78	■		6600	6000	5000	6000	5450	5000	7550
		39.6	9.8	99.2			14550	13227	11023	13227	12015	11023	16644
12.00-20	8.00-20	1088	259	84	■		8315	7560	6300	7560	6865	6300	9515
		42.8	10.2	105.6			18331	16666	13889	16666	15134	13889	20976
12.00-20	8.50-20	1094	259	84	■		8315	7560	6300	7560	6865	6300	9515
		43.1	10.2	105.6			18331	16666	13889	16666	15134	13889	20976
12.00-24	8.00TG-24	1178	278	99	■		8845	8040	6700	8040	7305	6700	10115
		46.4	10.9	124.8			19499	17725	14770	17725	16104	14770	22299
12.00-24	8.50-24IRA	1178	278	99	■		8845	8040	6700	8040	7305	6700	10115
		46.4	10.9	124.8			19499	17725	14770	17725	16104	14770	22299
14.00-24	10.00-24IRA	1320	333	112	■		12210	11100	9250	11100	10085	9250	13970
		52	13.1	140.8			26918	24471	20392	24471	22233	20392	30798

## 10.00-20 CAMSO WEX 782S

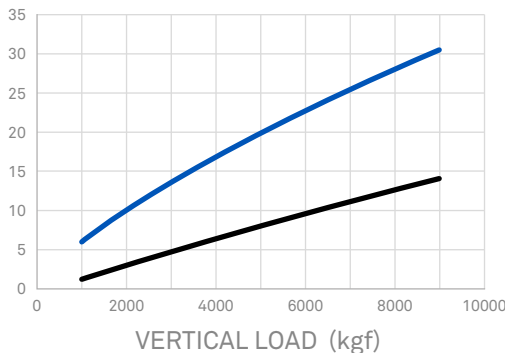

- VERTICAL DEFLECTION (mm)
- HORIZONTAL DEFLECTION (mm)



The **Camso WEX 782S** features a multi-stage solid construction for **improved stability and durability** making it an ideal choice for scrapyards and recycling applications.

AUTHORIZED DISTRIBUTOR:

[camso.co](http://camso.co)



FORMERLY CAMOPLAST SOLIDEAL